

# Product Environmental Profile

## Power Distribution Module




## General information

<b>Representative product</b>	Power Distribution Module 2330L6-23-380 -PDM2330L6-23-380
<b>Description of the product</b>	Power Distribution Units, while monitoring current and connection of modules, within data centers or related applications.
<b>Description of the range</b>	Power Distribution Modules (PDMs) provide safe connect/disconnect of Power Distribution Units to a power source, while monitoring the current and connection within data centers or related applications.  The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.
<b>Functional unit</b>	Provision of 200V 30A power to one power distribution unit with safe connection/disconnection protection for a duration of 20 years.

## Constituent materials

**Reference product mass** 2025 g including the product, its packaging and additional elements and accessories

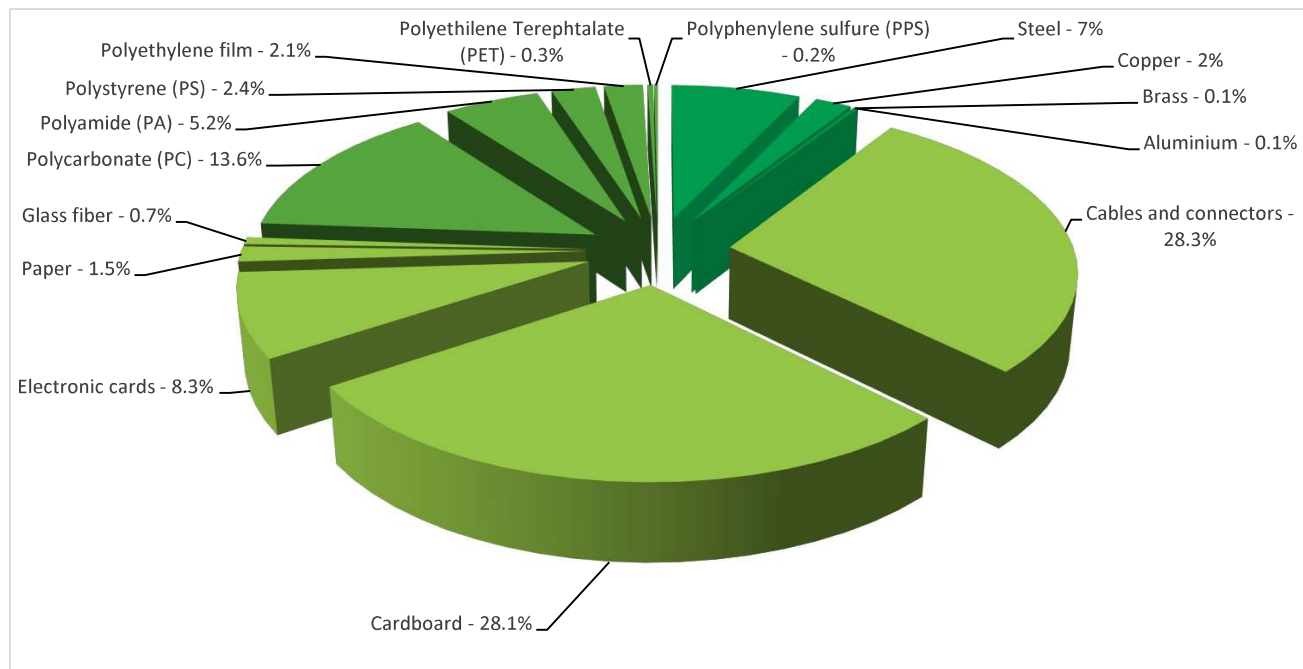

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive.

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The Power Distribution Module 2330L6-23-380 presents the following relevant environmental aspects

<b>Design</b>	Power Distribution Modules (PDMs) are designed at a Schneider Electric Design Center that utilizes a design process that conforms to the requirements of the IEC 62430 "Environmentally Conscious Design for Electrical and Electronic Products" standard.
<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging are optimized, based on the European Union's packaging directive Packaging weight is 767.3 g, consisting of Cardboard (89%), PE film (6%) and Paper (5%) Product distribution is optimised by setting up local distribution centres
<b>Installation</b>	PDM2330L6-23-380 PDM does not require any special installation materials or operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains external electrical cables (607 g) and printed circuit boards &gt;10cm2 (201 g) that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a></p> <p>Recyclability potential: <b>27%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>



## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Passive products - continuous operation			
<b>Installation elements</b>	Transport and disposal of packaging are accounted for during installation. No special installation components needed.			
<b>Use scenario</b>	Product dissipation is 27.9142 W with loading rate at 30% and service uptime percentage is 100%			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The means of material production, processing and transport modeled are representative of the technologies used in production.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Asia, EU and global	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27


### Compulsory indicators

### Power Distribution Module 2330L6-23-380 - PDM2330L6-23-380

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
-------------------	------	-------	---------------	--------------	--------------	-----	-------------

- Power Distribution Module

Contribution to mineral resources depletion	kg Sb eq	8.96E-04	6.88E-04	0*	0*	2.08E-04	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.01E+01	5.64E-02	0*	0*	9.99E+00	0*
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	6.34E-01	2.80E-02	1.04E-04	1.91E-03	6.03E-01	3.48E-04
Contribution to global warming	kg CO <sub>2</sub> eq	2.41E+03	1.35E+01	0*	1.01E+00	2.40E+03	1.09E+00
Contribution to ozone layer depletion	kg CFC11 eq	1.58E-04	1.54E-06	0*	0*	1.56E-04	4.34E-08
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	5.54E-01	4.20E-03	0*	2.44E-04	5.49E-01	9.15E-05
<b>Resources use</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Net use of freshwater	m <sup>3</sup>	8.69E+03	0*	0*	0*	8.69E+03	0*
Total Primary Energy	MJ	4.81E+04	2.40E+02	0*	0*	4.79E+04	5.22E+00

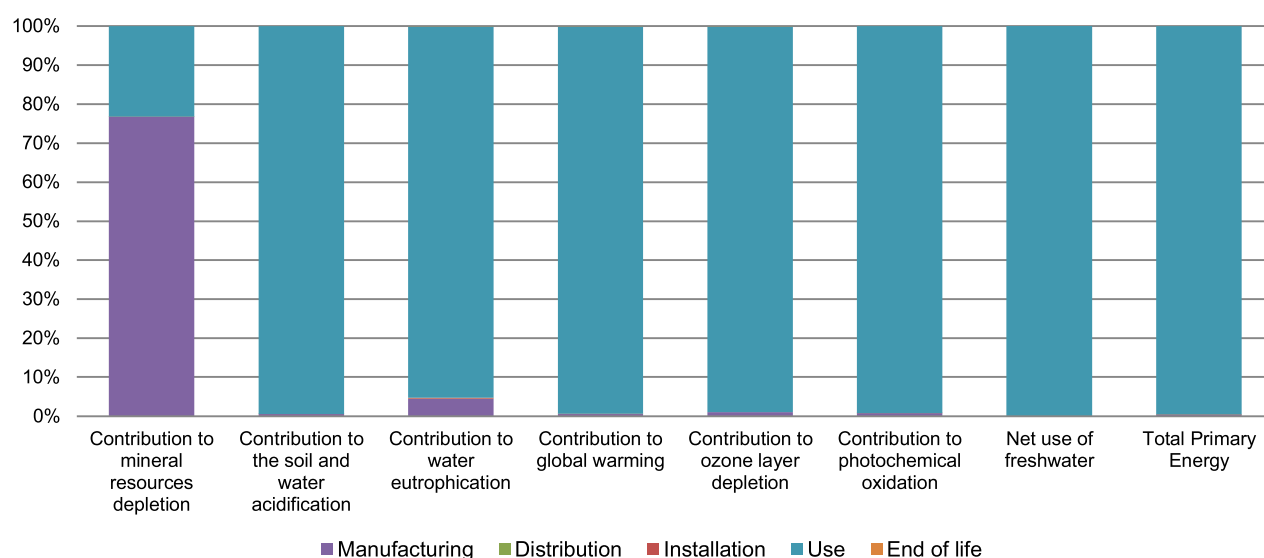

Optional indicators		Power Distribution Module 2330L6-23-380 - PDM2330L6-23-380					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.74E+04	1.89E+02	0*	0*	2.72E+04	4.37E+00
Contribution to air pollution	m <sup>3</sup>	1.05E+05	1.71E+03	0*	0*	1.03E+05	3.33E+01
Contribution to water pollution	m <sup>3</sup>	1.03E+05	2.88E+03	1.66E+01	5.68E+01	9.89E+04	6.87E+02
<b>Resources use</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Use of secondary material	kg	9.43E-02	9.43E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	6.09E+03	8.03E+00	0*	0*	6.09E+03	0*
Total use of non-renewable primary energy resources	MJ	4.20E+04	2.32E+02	0*	0*	4.18E+04	5.22E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	6.08E+03	0*	0*	0*	6.09E+03	0*
Use of renewable primary energy resources used as raw material	MJ	1.40E+01	1.40E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.20E+04	1.94E+02	0*	0*	4.18E+04	5.22E+00
Use of non renewable primary energy resources used as raw material	MJ	3.83E+01	3.83E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
<b>Waste categories</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Hazardous waste disposed	kg	1.35E+01	8.44E+00	0*	0*	1.25E+00	3.78E+00

- Power Distribution Module

Non hazardous waste disposed	kg	8.96E+03	2.36E+01	0*	0*	8.93E+03	0*
Radioactive waste disposed	kg	5.97E+00	3.28E-03	0*	0*	5.97E+00	0*
<b>Other environmental information</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Materials for recycling	kg	4.84E-01	3.00E-02	0*	0*	0*	4.54E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.22E-01	4.00E-03	0*	0*	0*	1.18E-01
Exported Energy	MJ	2.12E-02	0*	0*	2.12E-02	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2016-11.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

The environmental indicators of other products in this family may be proportional extrapolated, by life cycle phase, based on the ratio of the amount of a key parameter of the product, over the amount of that key parameter within the reference product. Proportionality rules are based on the following key parameters for impacts by lifecycle phase: Manufacturing phase impacts - mass of the electronic boards (with components) and mass of the power cord.\* Distribution phase impacts - total mass of product (including packaging). Installation phase impacts - mass of packaging. Use phase impacts - product lifetime energy consumption. End of Life impacts - the product mass (excluding packaging).

\*For all other phases the parameter ratio times the reference phase impact will generally yield the product phase impact. For the manufacturing phase the impact is to be multiplied by the average of the first and second parameter ratios.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°		Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH-08	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	01/2017	Information and reference documents	
		Validity period	6 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			

Schneider Electric Industries SAS  
 Customer Care Center  
[www.schneider-electric.com/contact](http://www.schneider-electric.com/contact)  
 35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric  
 © 2016 - Schneider Electric – All rights reserved